


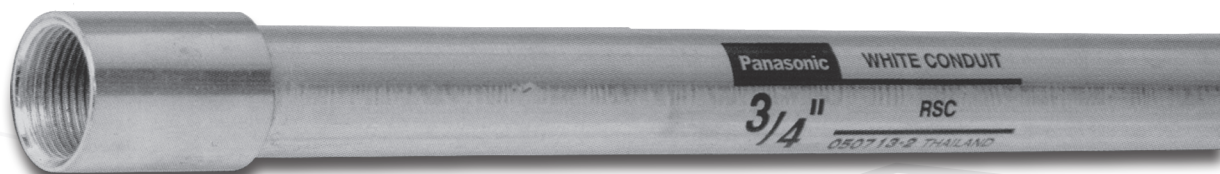


Panasonic

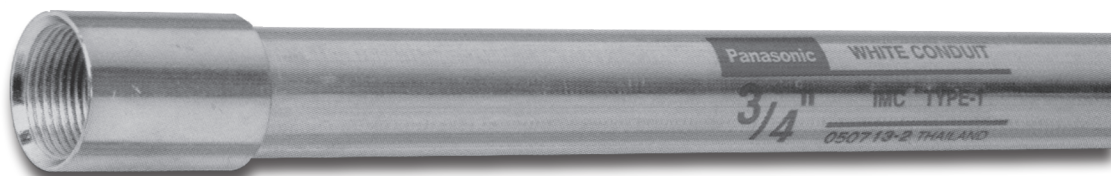

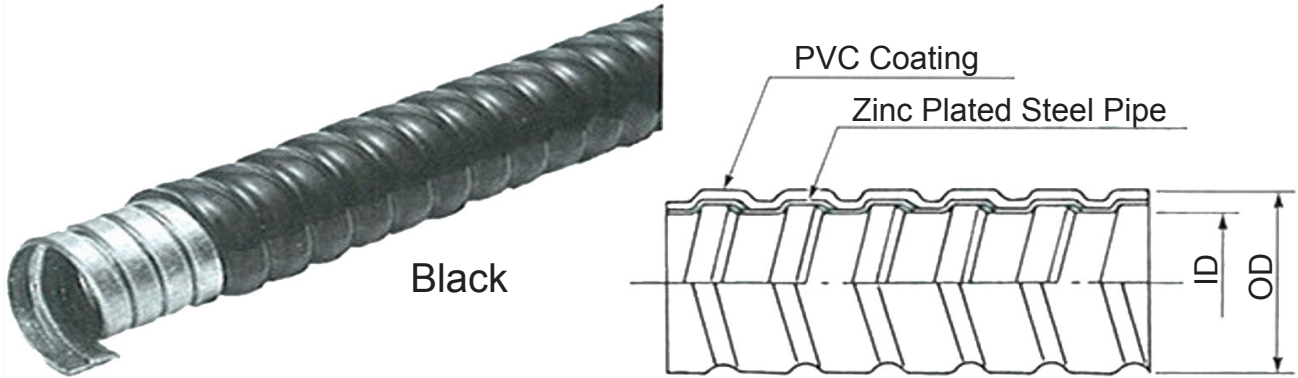


NO.	Model No.	Nominal Size		ID	OD	OD Tol.	Min. ID	M/roll	wiegth (kg)	
		mm	inch						roll	1M
1	DMA110B	10	1/4	10.3	15.2	±0.2	10.0	50	10.0	0.20
2	DMA112B	12	3/8	12.6	17.8	±0.2	12.3	50	11.5	0.23
3	DMA116B	16	1/2	16.1	21.1	±0.2	15.8	50	14.0	0.28
4	DMA122B	22	3/4	21.1	26.0	±0.2	20.8	30	10.0	0.33
5	DMA128B	28	1	26.8	33.1	±0.2	26.5	30	15.5	0.52
6	DMA136B	36	1-1/4	35.4	41.8	±0.2	35.2	20	13.0	0.65
7	DMA142B	42	1-1/2	40.4	47.9	±0.2	40.1	20	15.0	0.75

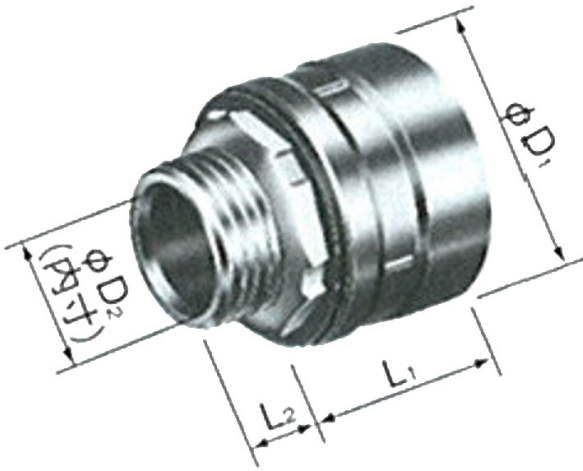

Connect between Mechanical Flex Tube and Box or Panel (with Inner Cap).
 Zinc Plated Coating.
 Inner Cap is same Specification as Bushing.
 For Thick Wall Conduit Pipe Connector / Type E

NO.	Model No.	Nominal Size		D1	D2	L1	L2	Screw
		mm	inch					
1	DMB110	10	1/4	27.5	15.4	20.5	14	CTG16
2	DMB112	12	3/8	30.0	15.4	20.5	14	CTG16
3	DMB116	16	1/2	34.5	15.4	23.0	14	CTG16
4	DMB122	22	3/4	40.2	21.0	24.0	14	CTG22
5	DMB128	28	1	47.4	27.6	25.0	16	CTG28
6	DMB136	36	1-1/4	59.2	36.9	29.3	18	CTG36
7	DMB142	42	1-1/2	65.3	42.3	29.3	18	CTG42

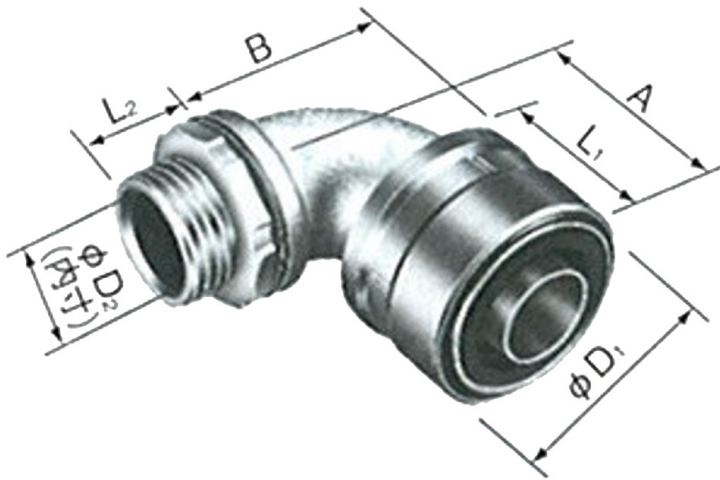

(with Inner Cap).
 Zinc Plated Coating.
 Inner Cap is same Specification
 as Bushing.
 For Thick Wall Conduit Pipe
 Connector / Type E


NO.	Model No.	Nominal Size		D1	D2	L1	L2	A	B	Screw
		mm	inch							
1	DMC110	10	1/4	27.5	15.0	20.5	14	35.5	31.8	CTG16
2	DMC112	12	3/8	30.0	15.0	20.5	14	35.5	35.0	CTG16
3	DMC116	16	1/2	34.5	15.0	23.0	14	41.0	38.3	CTG16
4	DMC122	22	3/4	40.2	20.0	24.0	14	45.0	44.6	CTG22
5	DMC128	28	1	47.4	26.0	25.0	16	51.0	53.2	CTG28
6	DMC136	36	1-1/4	59.2	35.0	29.3	18	60.3	64.6	CTG36
7	DMC142	42	1-1/2	65.3	40.0	29.3	18	65.3	72.7	CTG42



EMT Normal Bend



EMT Coupling



ท่อทาง ชนิด EMT (Electrical Metallic Tubing)


Listed by UL File No. E-4405

UL 797


Size (inch)	Outside Diameter (mm)	Minimum Wall Thickness (mm)	Length (mm)	Nominal Weight (kg/pc)	Primary Bundle (pcs)	Master Bundle (pcs)
1/2	17.93	1.02	3,048	1.46	10	500
3/4	23.42	1.18	3,048	2.21	10	300
1	29.54	1.37	3,048	3.08	5	200
1 -1/4	38.35	1.57	3,048	4.74	5	125
1 -1/2	44.20	1.57	3,048	5.49	5	100
2	55.80	1.57	3,048	6.99	3	75



IMC Normal Bend



IMC Coupling

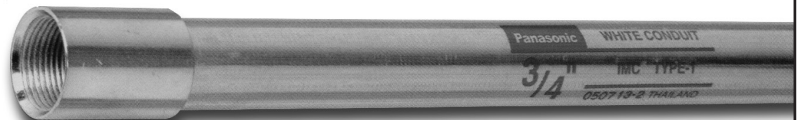

ท่อทาง ชนิด IMC (Intermediate Metal Conduit)


Listed by UL File No. E-6219

UL 1242


Size (inch)	Outside Diameter (mm)	Minimum Wall Thickness (mm)	Length (mm)	Nominal Weight (kg/pc)	Primary Bundle (pcs)	Master Bundle (pcs)
1/2	20.70	1.79	3,030	2.85	10	300
3/4	26.14	1.90	3,030	3.94	10	250
1	32.77	2.16	3,025	5.23	5	125
1 -1/4	41.59	2.16	3,025	7.48	3	75
1 -1/2	47.81	2.29	3,025	8.67	3	75
2	59.93	2.41	3,025	11.65	-	50
2 -1/2	72.56	3.56	3,010	18.71	-	40
3	88.29	3.56	3,010	22.87	-	30
3 -1/2	100.86	3.56	3,005	26.43	-	20
4	113.40	3.56	3,005	29.84	-	15



RSC Normal Bend



RSC Coupling

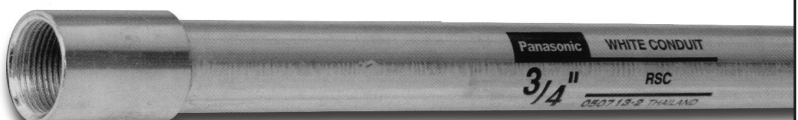

ท่อทาง ชนิด RSC (Rigid Steel Conduit)

Listed by UL File No. E-157617

UL 6

Size (inch)	Outside Diameter (mm)	Minimum Wall Thickness (mm)	Length (mm)	Nominal Weight (kg/pc)	Primary Bundle (pcs)	Master Bundle (pcs)
1/2	21.34	2.64	3,030	3.75	10	300
3/4	26.67	2.72	3,030	4.96	10	250
1	33.40	3.20	3,025	7.33	5	125
1 -1/4	42.16	3.38	3,025	9.97	3	75
1 -1/2	48.26	3.51	3,025	11.94	3	75
2	60.33	3.71	3,025	16.00	-	50
2 -1/2	73.03	4.90	3,010	25.62	-	40
3	88.90	5.21	3,010	33.43	-	30
4	114.30	5.72	3,005	47.38	-	15
5	141.30	6.22	2,995	64.38	-	10
6	168.28	6.76	2,995	84.05	-	5

- Note: From 2-1/2" and higher, figures are hot-dip galvanized both inside and outside.
- BS, JIS Standard are available.

